

SEDIMENTS IN COLLAPSE DOLINES ON THE KRAS PLATEAU, SLOVENIA

SEDIMENTI V UDORNICAH NA KRASU, SLOVENIJA

Uroš Stepišnik



UROŠ STEPIŠNIK

Collapse doline Velika dolina above Škocjanske jame.
Udornica Velika dolina nad Škocjanskimi jamami.

Sediments in collapse dolines on the Kras plateau, Slovenia

DOI: 10.3986/AGS51201

UDC: 911.2:551.435(497.471)

COBISS: 1.01

ABSTRACT: The article presents a detailed geomorphological analysis of collapse dolines on the Kras plateau in Slovenia with particular stress on the morphogenetic development of their floors covered with loamy sediment. Granulometric and mineral composition of the loamy sediment were analysed and the depths of sediment fills were established with electrical resistivity imaging (ERI). Collapse doline development and transformation processes are discussed, and various formation mechanisms of flat loamy doline floors are considered in the article. The results of the study revealed that loamy fills may represent sedimentation of suspended material from floodwaters that inundated the lower parts of the collapse dolines, or could have originated in now-demolished cave passages on the slopes that were filled with finer material. Some sediment has been accumulated as an aeolian deposit.

KEYWORDS: geography, karst, collapse doline, loamy sediment, electrical resistivity imaging (ERI), Slovenia

The article was submitted for publication on October 18, 2010.

ADDRESS:

Uroš Stepišnik, Ph. D.

Department of Geography

Faculty of Arts, University of Ljubljana

Aškerčeva 2, SI – 1000 Ljubljana, Slovenia

E-mail: uros.stepisnik@gmail.com

Contents

1	Introduction	235
2	Collapse dolines on the Kras plateau	235
2.1	Collapse dolines on the Divača karst	236
2.2	Collapse dolines on the Sežansko – Nabrežinski ravnik	238
2.3	Collapse dolines north of the Divača fault line	241
2.4	Collapse dolines on the ridges of Taborska brda and Gabrk	242
3	Conclusion	244
4	References	245

1 Introduction

Collapse dolines are surface karst depressions of varied shape and size. Volumes of larger collapse dolines exceed the volumes of the largest known cave chambers in the area, so collapse doline formation cannot be related solely to collapse processes of cave chambers (Habič 1963; Šušteršič 1973; Stepišnik 2004; Waltham et al. 2005; Stepišnik 2007). Their origin is related to the concentric removal of material of tectonically fractured carbonate bedrock above active cave passages (Habič 1963; Mihevc 2001; Stepišnik 2004). Although collapse dolines have commonly been defined as depressions that are formed solely by collapse above cave chambers (Cramer 1941; Gams 1973; Šušteršič 1973, Ford and Williams 1989), a variety of speleogenetic mass removal processes contributes to their development.

Several morphological classifications of collapse dolines have appeared in published karstological literature. The most common is the simple subdivision of collapse dolines into »immature« and »mature« or »degraded« (Habič 1963; Šušteršič 1984; Summerfield 1996, Waltham et al. 2005; Waltham 2006). However, collapse doline morphology is a result of the establishment of a balance between various geomorphic processes, whose dynamics, extent and duration inside the collapse dolines influence their size and shape. Because of this, the classical view of collapse dolines, which estimates their age on the basis of their general morphology, is not appropriate.

Collapse doline floors are subjected to a number of processes that result in the development of a variety of floor morphologies. If constant removal of material occurs in collapse dolines above active cave passages, the floors are rocky with funnel-shaped depressions in accumulated talus. If the process of material removal is negligible or absent, the floors are bowl-shaped and are filled with the finer fractions of weathered bedrock, commonly covered with soil. Loamy material is common on the floors of collapse dolines. If the floor is close or in the piezometric level, the lower parts of the collapse dolines are permanently or periodically filled with water, or active water flow is present. In most cases the floors of such collapse dolines are flooded only periodically, during higher piezometric levels. If floodwaters contain significant suspended load, sediment will eventually be deposited from a stagnant water body in collapse doline floors. Each ensuing flood will result in deposition of additional loamy sediment layers on the floor. The ultimate outcome of such sedimentation is the establishment of flat, loamy floors in collapse dolines (Stepišnik 2003; Stepišnik 2007). The occurrence of flat collapse doline floors at similar elevations is a result of sedimentation of suspended material from floodwaters that inundated the lower parts of several neighbouring collapse dolines at the same flooding events (Stepišnik 2004; Stepišnik 2007). If their floors, filled with loamy material, are positioned tens or hundreds of meters above piezometric level, it is impossible for that material to originate from floodwaters. In most cases it is a washed slope-material from loamy patches. The loamy material on the slopes originated from now-demolished cave passages which used to be completely filled with loamy material (Stepišnik, 2007).

This article focuses on a detailed geomorphic analysis of collapse dolines on the Kras plateau with particular stress to morphogenetic development of their floors. The research included geomorphological mapping of all collapse dolines on the Kras plateau as well as granulometrical and petrological analyses of loamy sediment from the collapse doline floors. The subsurface structure of the doline floors was established using Electrical Resistivity Imaging (ERI) techniques, with subsequent interpretation of the ERI data. A SuperSting R1/IP earth resistivity meter was used for subsurface data collection.

Previous application of ERI method in various karst surface features on Slovenian karst revealed that the resistivity value for carbonate rock exceeds 1000 ohm-m. For soil and weathered bedrock, the resistivity values are approximately between 200 and 1000 ohm-m. Loamy material has resistivity values lower than 150 ohm-m (Stepišnik 2007; Stepišnik and Mihevc 2008, Stepišnik, 2009).

2 Collapse dolines on the Kras plateau

Kras is a limestone plateau situated above Trieste bay in the northern Adriatic Sea. It stretches in Dinaric (northwest–southeast) direction; it is 40 km long and 14 km wide and covers about 440 km². It is physiographically well individualized among the surrounding regions. Lower flysch regions and Adriatic Sea bound it from southwest and northeast. To the northwest it is surrounded by alluvial Isonzo (river Soča/Isonzo) plain. Southeast border of Kras can be well defined by flysch Brkini hills and river Reka valley. In general,

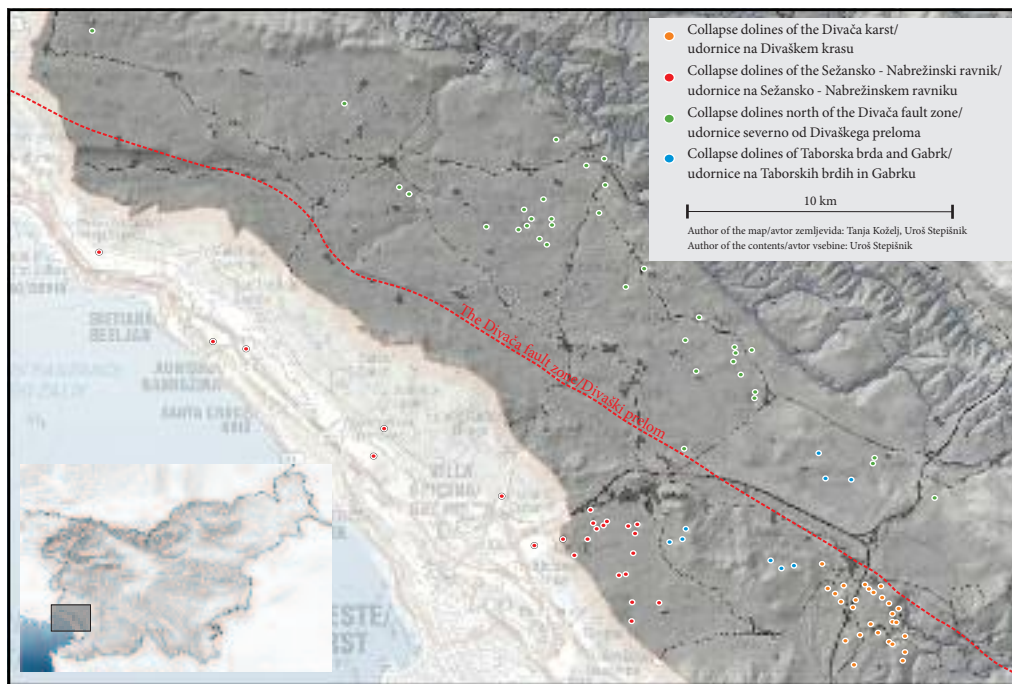


Figure 1: Location of collapse dolines on the Kras plateau.

the Kras plateau is an anticline of Cretaceous limestone and dolomite rising above two flysch synclines: syncline of the Vipava valley and syncline of the Trieste bay. One major tectonic line named the Divača fault zone is dissecting the Kras almost in half in Dinaric direction.

The Karst plateau is a trough-flow karst. In general, it is a hydrologic hinterland of karstic springs of Timava River. The biggest ponor of alogenic flow to the Kras is Reka River in the southeast, while smaller ponors are also present on the eastern margin and in the north where a number of smaller flows sink. Majority of the subsurface flow is directed south of the Divača fault zone from ponors of the Reka River towards springs northwest.

Collapse dolines are situated all over the Kras plateau. According to the spatial distribution, morphology and active geomorphologic processes, they can be divided into four groups: collapse dolines of the Divača karst, collapse dolines of the Sežansko-Nabrežinski ravnik, collapse dolines north of the Divača fault zone and collapse dolines of Taborska brda and Gabrk.

2.1 Collapse dolines of the Divača karst

The Divača karst is situated in south east part of the Kras between the hinterland of river Reka ponor and about town of Divača. The bedrock in the area comprises thick bedded Cretaceous limestone. The Divača karst is positioned northwest of the contact with Eocene flysch bedrock. At the end of extensive blind valley on the eastern flank river Reka sinks into cave system Škocjanske jame. Surface of the Divača karst is mainly planated at elevation 430 m and is dissected by numerous dolines, collapse dolines and denuded caves.

On the surface are 27 large collapse dolines having an overall volume of more than 41 Mm³. Their mean depth is about 45 m and mean diameter is 270 m. They cover an area of 1,5 km². The collapse dolines vary in their morphology. Most of their slopes are balanced but extensive rocky walls and scree also occur. Except Velika dolina and Mala dolina, situated directly above Škocjanske jame where underground flow of river Reka reappears on the surface, all collapse dolines have inundated floors levelled by loamy deposits.

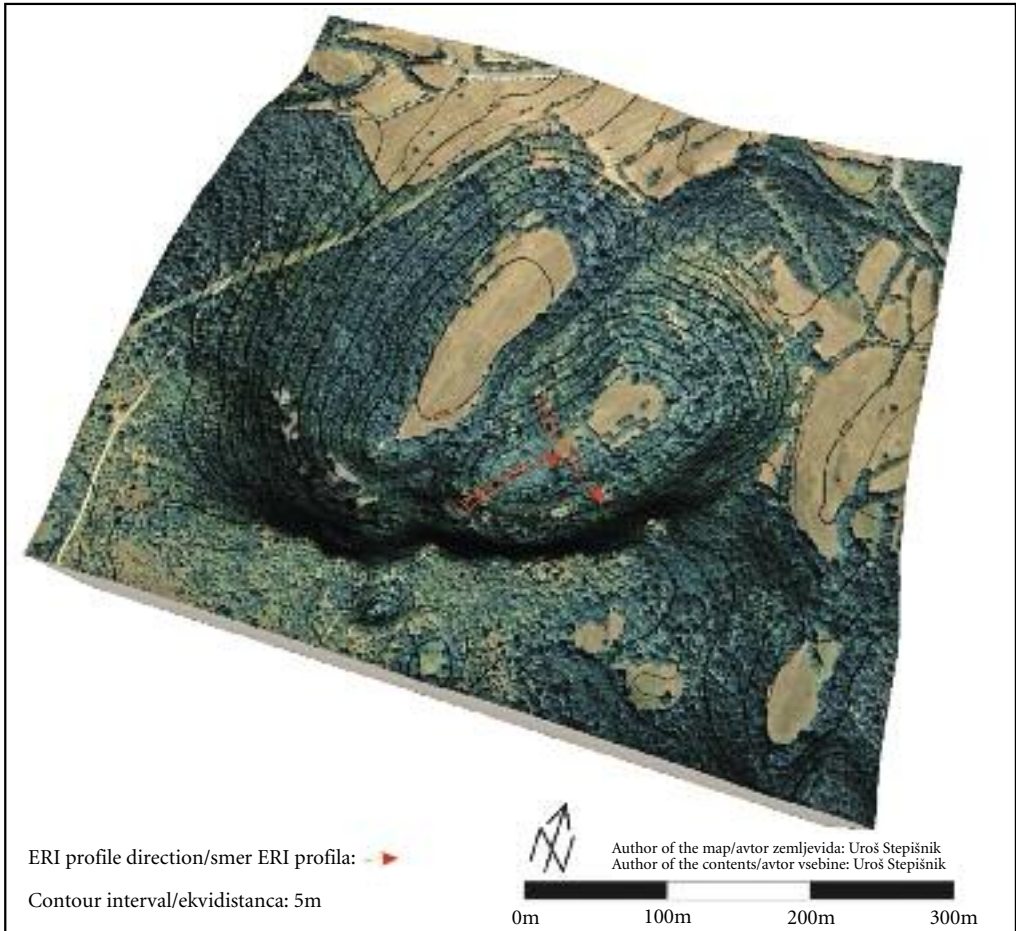


Figure 2: Collapse doline Sokolak with directions of ERI profiles.

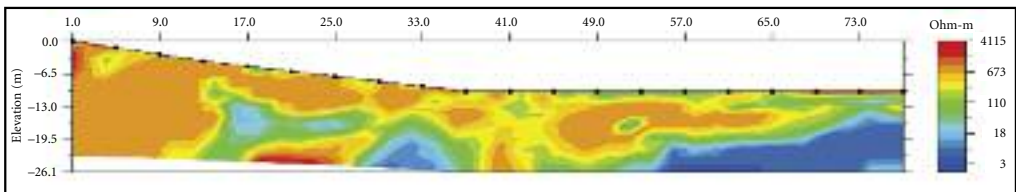


Figure 3: ERI profile 1 of collapse doline Sokolak.

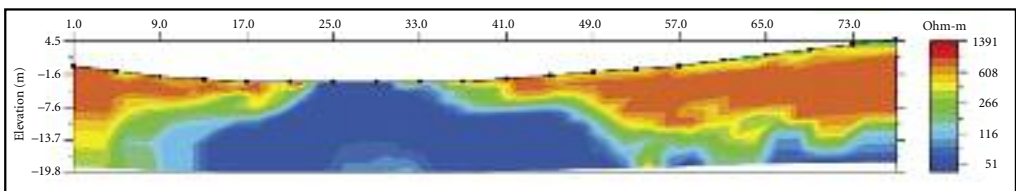


Figure 4: ERI profile 2 of collapse doline Sokolak.

Petrological analysis of the sandy fraction in the sediment revealed that the loam contains minerals of flysch origin: chert, limonite, quartz sandstone and mica. Grain-size analysis of the sediment showed that the loam comprises mainly clay and silt size particles.

Several neighbouring collapse dolines have flat loamy floors at the same elevations. In the Divača karst some of the collapse doline floors fall into groupings at two general levels. Those in the southern side near Sokolak lie at elevations between 350 and 360 m. The floors in the northern group of collapse dolines between Sapendol and Lazni dol are at elevations between 415 m and 433 m. Comparable floor level elevations inside many collapse dolines are the result of sedimentation of fine flysch derived particles from stagnant water during higher piezometric levels when floodwater inundated floors of the collapse dolines.

Typical example of a collapse doline form the southern group is Sokolak which is located some 650 m southwest from river Reka ponor. Sokolak consists of two elongated collapse dolines stretching in north-south direction. Western collapse doline has longer diameter 470 m and shorter 230 m with average depth 63 m. Eastern collapse doline has longer diameter 540 m and shorter 230 m. Average depth is 66 m. Volume of both collapse dolines is 6.86 Mm³. The slopes of the collapse doline in the southern part are steep rocky walls with extensive scree at the foot. Other slopes are mostly balanced and are covered with grikes. Floors of the dolines are flattened with loamy material. The western side of the doline is flattened on elevation 350 m and the eastern side is on elevation 357 m. Elevation of their floor corresponds to the elevation of several surrounding collapse doline floors on level between 350 m and 360 m.

Both ERI surveys were conducted in the eastern part of the collapse doline. ERI profile 1 at the foot of the southern slope (direction 30° with 5 m electrode pair spacing) revealed that its limestone scree slopes, which are not covered with soil or vegetation, have resistivity values higher than 1000 ohm-m. At the foot of the slope there is an extensive loamy fill in the collapse doline floor with resistivity value below 150 ohm-m, covered with limestone rubble with resistivity value between 150 and 1000 ohm-m. ERI profile 2 was conducted transversely to the elongated collapse doline floor in direction of 120° with the same electrode spacing. Here, bedrock slopes with resistivity values higher than 1000 ohm-m are covered with thin layer of less resistant soil and weathered rock with resistivity value up to 500 ohm-m. In the central part of the profile, the floor is flattened with loamy sediment with resistivity value lower than 150 ohm-m that fills the bottom of the doline up to the depth at least 23 m.

Lazni dol belongs to the northern group of collapse dolines. It is situated 1500 m northwest from river Reka ponor. It is elongated in northwest-southeast direction with longer diameter 280 m and shorter diameter 220 m. Average depth of the doline is 24 m and its volume amounts to 0,5 Mm³.

The slopes are balanced, covered with grikes with inclination up to 17°. The floor of the doline is an extensive loamy flat surface with longer diameter reaching 220 m. The lowest section of the floor is at the elevation of 424 m. Elevation of the floor corresponds to the elevation of several surrounding collapse doline in the northern part of the Divača karst which have floors on level between 415 m and 433 m. Two ERI surveys were conducted in Lazni dol. ERI profile 1 in the doline floor in direction of 135° revealed that lower section of its bedrock slopes is covered with a thin layer of less resistant soil and weathered rock with resistivity values ranging between 200 and 1000 ohm-m. The infill of the loamy material in the doline floor has resistivity values up to 150 ohm-m. Limestone bedrock underlying the slope material and parts of the loamy sediment floor infill has resistivity values higher than 1000 ohm-m. In the central part of the doline, the thickness of the more conductive material exceeds 25 m. ERI profile 2 in the direction of 225°. It revealed that floor of the doline is inundated with over 28 m of loamy material with resistivity value lower than 150 ohm-m.

2.2 Collapse dolines on the Sežansko-Nabrežinski ravnik

The area of Sežansko-Nabrežinski ravnik lies southwest of the Divača fault zone. Geologically, it is southwest dip of the Kras anticline which consists mostly of Cretaceous limestone and dolomite and is limited towards southwest by flysch. It is mostly planated karst surface which is gradually lowering from 350 m around Sežana to about 150 m in the northwest, dissected by numerous dolines, collapse dolines and denuded caves. This is an area of the subsurface Reka River flow towards northwest and the springs of Timava River.

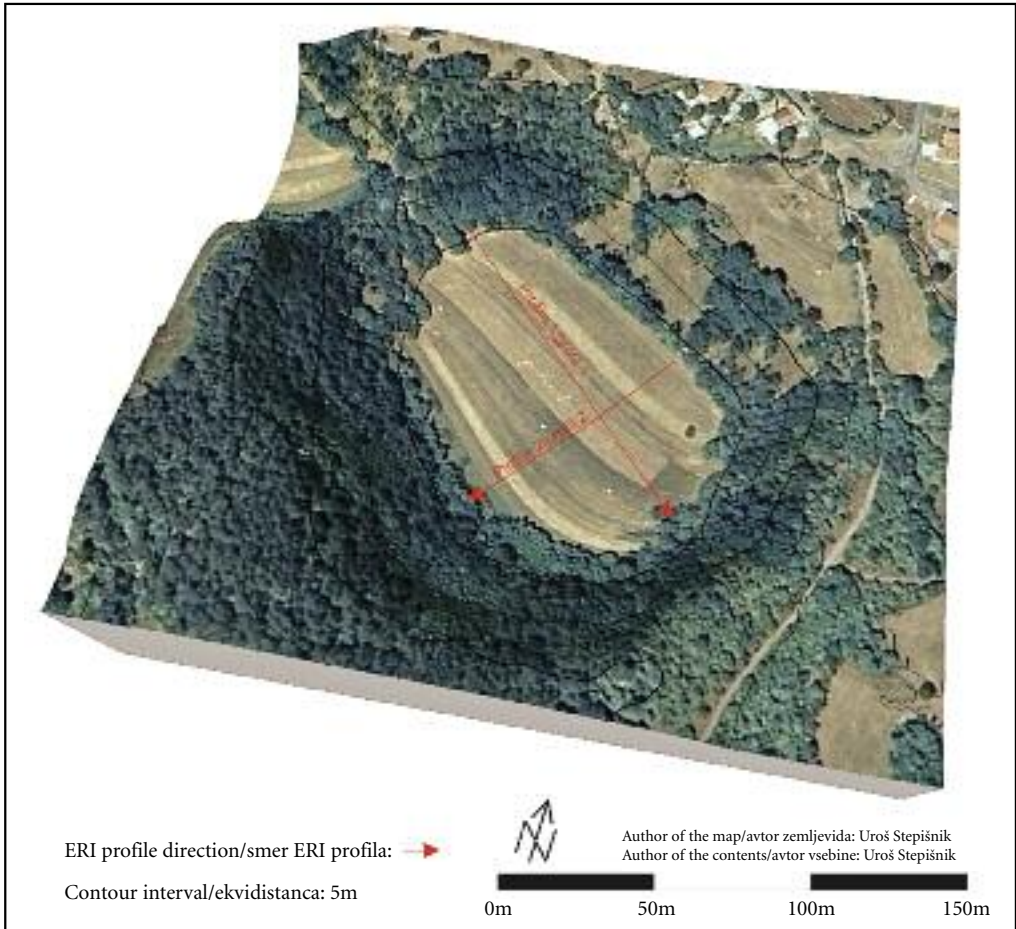


Figure 5: Collapse doline Lazni dol with directions of ERI profiles.

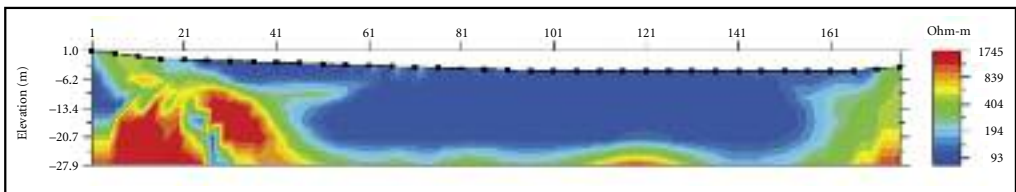


Figure 6: ERI profile 1 of collapse doline Lazni dol.

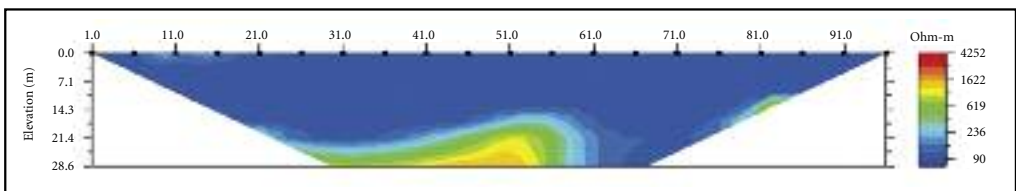


Figure 7: ERI profile 2 of collapse Lazni dol.

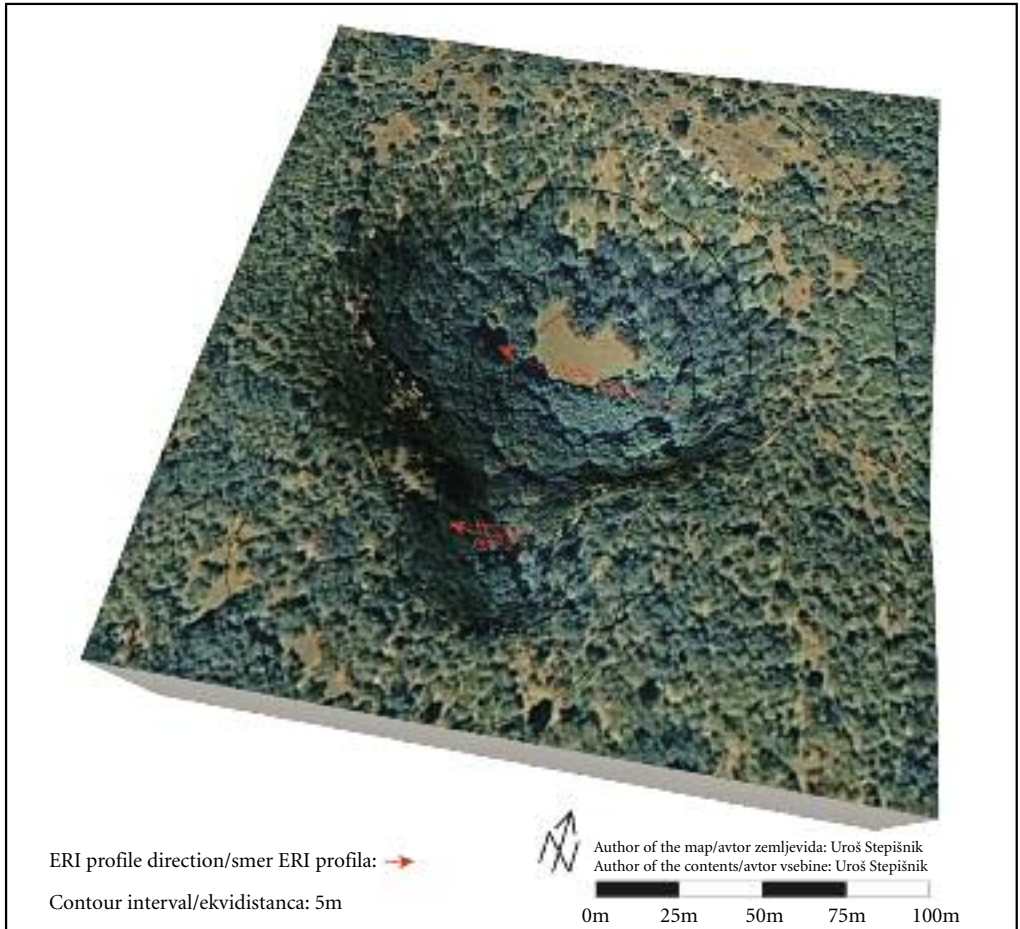


Figure 8: Collapse doline Sežanski dol with directions of ERI profiles.

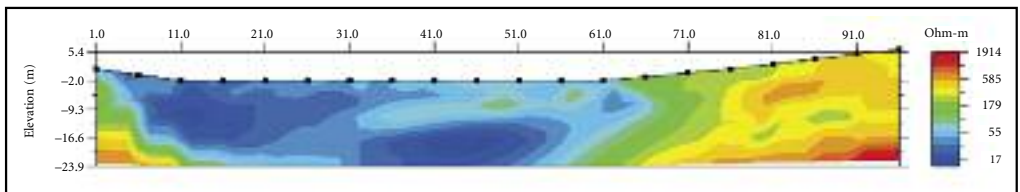


Figure 9: ERI profile 1 of collapse doline Sežanski dol.

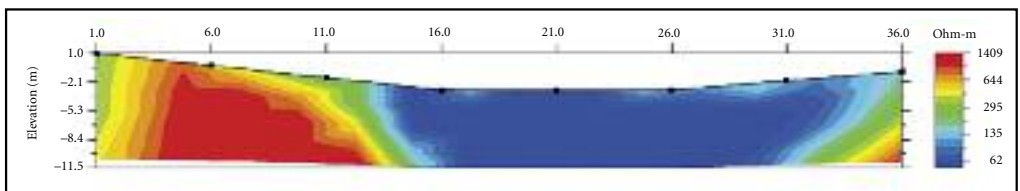


Figure 10: ERI profile 2 of collapse doline Sežanski dol.

On the surface there are 24 large collapse dolines with an overall volume of more than 38.1 Mm³. Their mean depth is about 33 m, mean diameter is 248 m. They cover an area of 2.2 km². The biggest collapse doline, Senik, exceeds 9.8 Mm³ in volume.

In general, collapse dolines of this area have uniform morphology. Most of the collapse dolines have balanced slopes and only some exhibit extensive rocky walls and scree. Some of the slopes are covered with patches of loamy material. These patches are dissected with gullies which continue into small alluvial fans on the doline floor. Patches of the loamy sediment are also present on the floors; however, here they are distinctly smaller than in the Divača Karst. Petrological analysis of the sandy fraction in the sediment revealed that the loam contains minerals of flysch origin. Grain-size analysis of the sediment revealed that the loam comprises mainly clay and silt size particles.

A Typical example of this collapse dolines group is Sežanski dol which is located south of the town Sežana. It has diameters of 230 m and shorter diameter 166 m. Average depth of the doline is 28 m with a volume of 0.42 Mm³. Its northern and north-eastern slopes are balanced. Other slopes are steep rocky walls with scree at the foot. The southern slope is dissected by an extensive gully, filled with loamy material and pieces of flowstone. The gully is a demolished cave passage on the slope of the collapse doline.

Two ERI surveys were conducted in Sežanski dol. ERI profile 1 of the doline floor was conducted across the floor in the direction of 270°. It revealed that lower section of its bedrock slopes are covered by a thin layer of less resistant soil and weathered rock with resistivity values ranging between 200 and 1000 ohm-m. The infill of loamy material in the doline floor has resistivity values up to 150 ohm-m. Limestone bedrock underlying the slope material has resistivity values higher than 1000 ohm-m. In the central part of the doline the thickness of loamy material exceeds 20 m.

ERI profile 2 was conducted perpendicular to the gully on the southern slope of the collapse doline. Direction of the profile is 270°. It showed that the gully, which was formed on a demolished cave passage fill, is inundated with loamy material with resistivity value lower than 150 ohm-m. Width of the loamy fill is about 25 m and depth at least 10 m.

2.3 Collapse dolines north of the Divača fault line

Almost half of the Karst plateau lies north of the Divača fault line. The bedrock in the area comprises mainly of thick bedded and massive Cretaceous limestone with chert. Hydrologically, it is the area of no significant subsurface flow as only smaller streams from north and northeast are sinking and flowing into direction of the Timava springs. The surface, largely planated on elevation 270 m, gradually lowers towards northwest to the elevation of about 170 m. Planated surface covered with numerous solution dolines, denuded caves, collapse dolines and dry valleys, is dissected with smaller ridges on the northern and on the eastern sides.

On the surface there are 36 large collapse dolines with an overall volume of more than 45.6 Mm³. Their mean depth is about 32 m, mean diameter is 274 m. They cover an area of 2.3 km². Every collapse doline in this area is significantly transformed since none of them has steep rocky slopes, and there is no other evidence of recent subsurface removal of material above active cave passages. All slopes are balanced and mostly covered by grikes. Occasionally even isolated dolines are present. The slopes of the collapse dolines have many erosion gullies on patches of loamy material from which material is being washed towards the doline floors. The floors of the dolines are usually large planated loamy surfaces. According to ERI surveys of the floors, loamy sediment is only a few metres thick and covers carbonate bedrock. Thus those collapse dolines are bowl shaped depressions in carbonate bedrock with loamy fills which are flattening the floors.

Grain-size analysis of the sediment showed that the loam which fills floors of the collapse dolines comprises mainly clay and silt size particles. Petrological analysis of the sandy fraction in the sediment revealed that the loam contains minerals of flysch origin.

Zajčnik is a typical example of this group of collapse dolines. It is located 5km southwest of the village Štanjel. The doline has a rounded shape with a diameter of about 230 m and a depth of 21 m and a volume of 0.42 Mm³. All slopes of the collapse doline are fully balanced and partially covered with grikes. The floor of the doline is flat, about 40 m wide and filled with loamy material at an altitude of 222 m.

ERI profile of the Zajčnik collapse doline was conducted across flattened floor in the direction 35°. It revealed that lower section of its bedrock slopes are covered by a thin layer of soil and weathered rock

with resistivity values ranging between 200 and 1000 ohm-m. The infill of loamy material in the doline floor has resistivity values up to 150 ohm-m. Limestone bedrock underlying the slope material and parts of the loamy sediment floor infill has resistivity values higher than 1000 ohm-m. In the central part of the doline, the thickness of loamy material is about 15 m.

2.4 Collapse dolines of Taborska brda and Gabrk

Taborska brda and Gabrk are two ridges in the south eastern part of the Kras plateau. They extend towards northwest and are up to 200 m higher than the surrounding karst plateau. They consist of limestone and

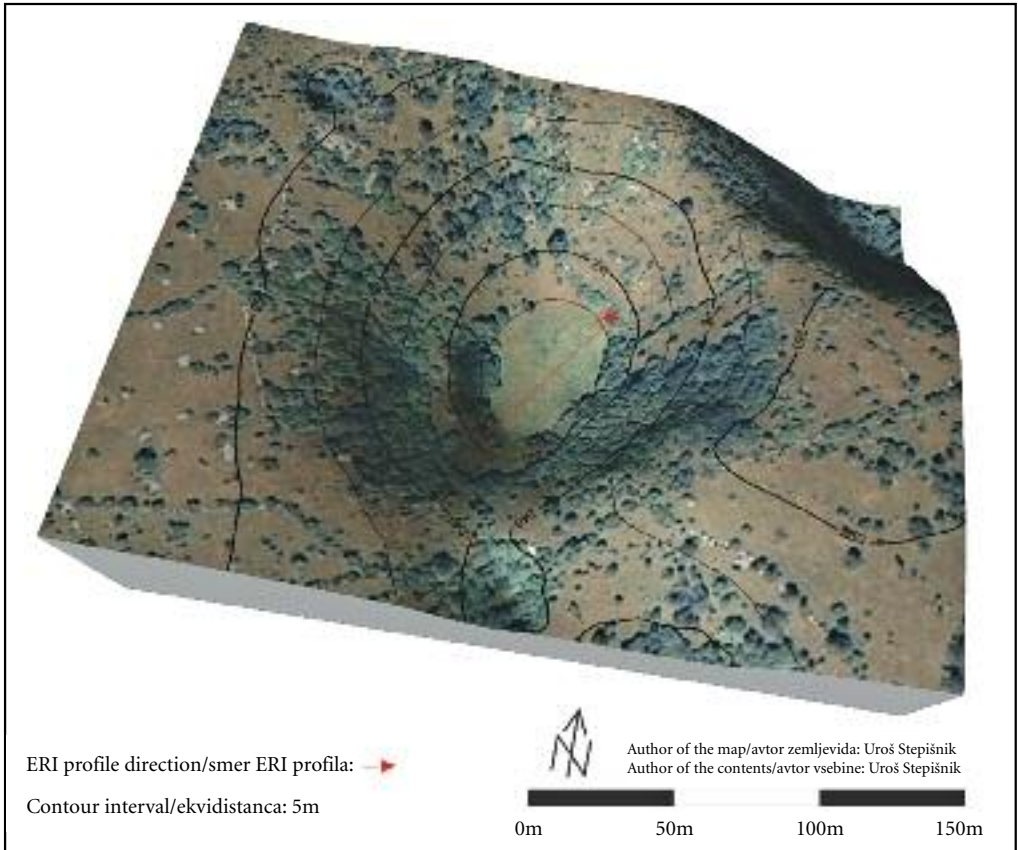


Figure 11: Collapse doline Zajčnik with directions of ERI profiles.

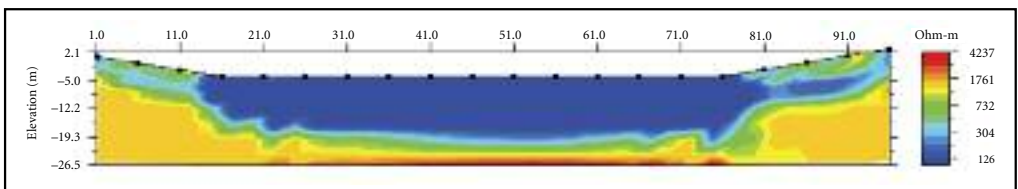


Figure 12: ERI profile of collapse doline Zajčnik.

dolomite of Cretaceous age. Surface of the ridges is covered with conic hills and dissected by numerous dolines and some collapse dolines.

On the ridges 9 collapse dolines are located. Their overall volume is about 3.2 Mm^3 , mean depth is about 28 m and mean diameter is 200 m. They cover an area of $0,2 \text{ km}^2$. They have diverse morphology with usually balanced slopes with some erosion gullies. Floors of this group of collapse dolines are flat and filled

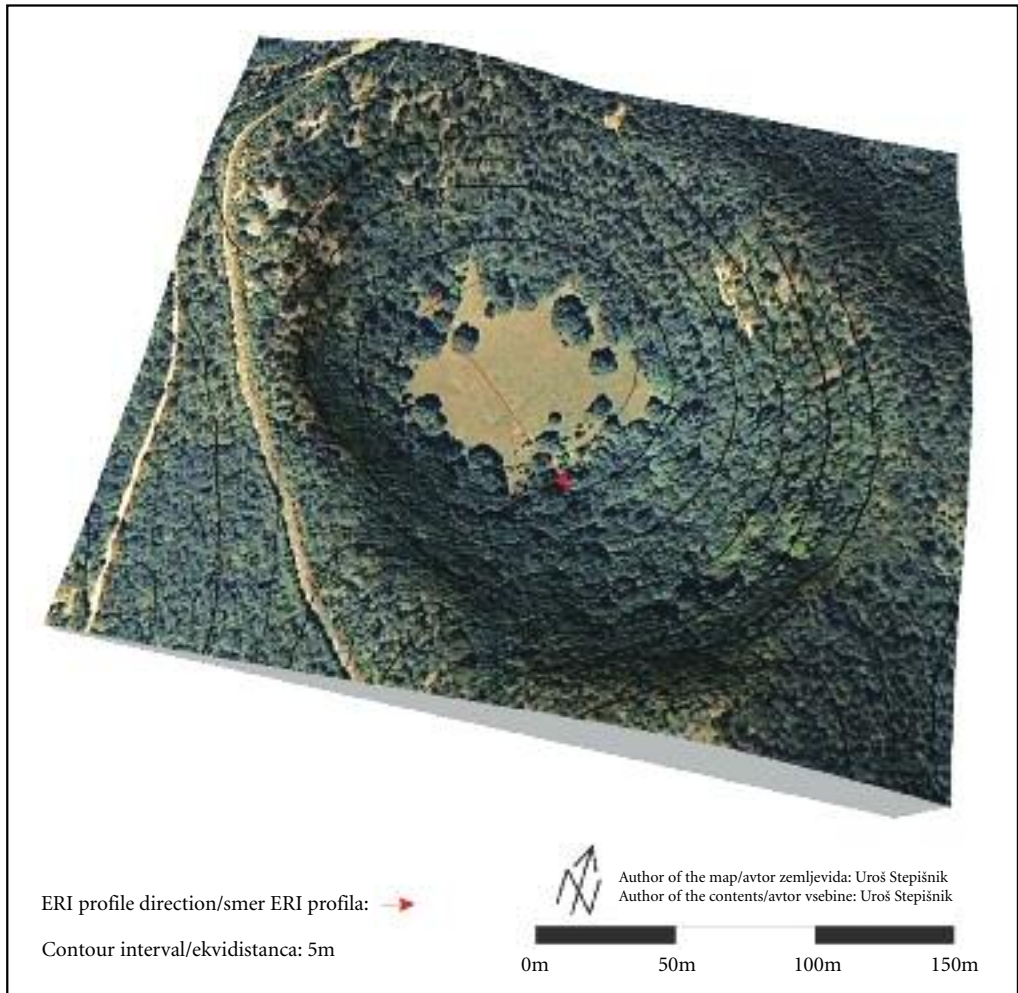


Figure 13: Collapse doline Dol Lipovnik with directions of ERI profiles.

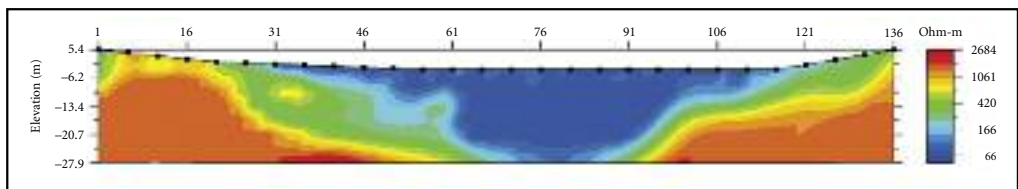


Figure 14: ERI profile of collapse doline Dol Lipovnik.

with loamy sediment. Those collapse dolines are morphologically closest to collapse dolines north of the Divača fault zone.

Grain-size analysis of the sediment revealed that the loam comprises mainly clay and silt and fine sand size particles. Petrological analysis of the sandy fraction in the sediment revealed that the loam contains particles of flysch origin. Fine grains of quartz particles of sandy fraction exhibit traces of wind abrasion on their surfaces.

The most characteristic example of the collapse doline in the area is Dol Lipovnik, which is located almost on the top of the ridge of Taborska brda about 1.5 km southeast of Sežana. It has longer diameter 290 m, shorter diameter 250 m and average depth 43 m. Volume of the doline is 1.24 Mm³. The upper sections of the eastern and western slopes are steep rocky walls with scree at the foot. Other slopes are balanced and have some grikes. Floor of the doline is flattened at the elevation of 443 m. Diameter of the flattened floor is 140 m.

ERI profile of the collapse doline Dol Lipovnik was conducted across flattened floor in the direction of 150°. It revealed that lower sections of its bedrock slopes are covered with a thin layer of soil and weathered rock with resistivity values ranging between 200 and 1000 ohm-m. The infill of loamy material in the doline floor has resistivity values up to 150 ohm-m. Limestone bedrock underlying the slope material and loamy sediment floor infill has resistivity values higher than 1000 ohm-m. Depth of the loamy fill is about 20 m. In the central part thickness of the loamy sediment locally exceeds 25 m.

3 Conclusion

The investigation of the collapse dolines on the Kras plateau presented in this article shows that the sediment in the floors is of various origin. Even though mechanisms of sedimentation are different, they result in the formation of relatively uniform flat floors.

Loamy sediment completely inundates original collapse doline floors. ERI was used in order to establish sediment thickness on the doline floors. Measurements revealed that the resistivity value for carbonate bedrock exceeds 1000 ohm-m. Loamy material has resistivity values lower than 150 ohm-m. For soil, weathered bedrock and scree the resistivity values are between 250 and 1000 ohm-m. Due to the lack of moisture, active scree slopes without soil cover and vegetation have resistivity values higher than 1000 ohm-m. In all investigated collapse dolines we can clearly see the difference between slopes and floors. The slopes show highly resistive bedrock, which is limestone or scree, possibly covered with weathered bedrock or a layer of soil or loamy sediment which display lower resistivity values. On the floors there are thick infills of loamy sediment and patches of slope material at the foot of the active slopes.

Loamy material filling floors of the dolines is flysch derived sediment which was accumulated by different mechanisms. On some collapse doline slopes are present traces of demolished cave passages filled with loamy sediment and flowstone. On those patches of impermeable sediment surface runoff of rainwater resulted in gully formation. Below gulleys in the floors smaller alluvial fans are positioned. That mechanism of loamy sediment sedimentation took place in most of the collapse dolines, but represents main inflow of sediment in collapse dolines positioned north of the Divača fault zone and on the Sežansko-Nabrežinski ravniki.

Another mechanism of accumulation of flysch derived sediment is active on Divača karst which is a ponor type of contact karst. Similar floor level elevations inside many collapse dolines suggest that the process that led to the sedimentation was active across a wide area at several collapse dolines at the time. The deposition of the loamy sediment fills inside the collapse dolines resulted from the River Reka oscillations and subsequent flooding inside the Divača karst. In the floors of the affected collapse dolines extended below the upper limits reached by the floodwaters supplying the loamy sediment flat floors were formed.

Some fine grains of quartz particles from the collapse doline floors exhibit traces of wind abrasion on their surfaces. The area of the Kras plateau is regularly influenced by strong Bora winds from north-east direction, where flysch Vipava valley is positioned. Limited amount of sediment in the doline floors must have been deposited as aeolian sediment.

4 References

- Cramer, H. 1941: Die Systematik der Karstdolinen. Neues Jahrbuch für Mineralogie, Geologie und Paläontologie 85-1. Berlin.
- Ford, D. C., Williams P. W. 1989: Karst Geomorphology and Hydrology. Unwin Hyman. London.
- Gams, I. 1983: Škocjanski kras kot vzorec kontaktnega krase. Zaščita Krasa ob 160-letnici turističnega razvoja Škocjanskih jam. Sežana.
- Gams, I., 1973: Slovenska kraška terminologija. Ljubljana.
- Gospodarič, R. 1984: O starosti sige v Škocjanskih jamah. Zaščita Krasa ob 160-letnici turističnega razvoja Škocjanskih jam. Sežana.
- Gospodarič, R. 1985: Age and developement of collapse dolines above the cave systems the exaples from classical karst of Slovenia (NW Yugoslavia). Annales de la Societe Geologique de Belgique 108-1. Lige.
- Habič, P. 1963: Udorne vrtače – koliševke in podzemski tokovi. Sarajevo.
- Mihevc, A. 1997: Doline, their morhology and origin, case study: dolines from the Kras, west Slovenia (the Škocjan karst). Fourth International Conference on Geomorphology. Milano.
- Mihevc, A. 2001: The Speleogenesis of the Divača karst. Ljubljana.
- Radinja, D. 1967: Vremska dolina in Divaški kras. Problematika kraške morfogeneze. Geografski zbornik 10. Ljubljana.
- Stepišnik, U. 2003. Morfogenetske značilnosti vrhniških udornic. Naše jame 45. Ljubljana.
- Stepišnik, U. 2004. The origin of sediments inside the collapse dolines of Postojna karst (Slovenia). Acta carsologica 33. Ljubljana.
- Stepišnik, U. 2007: Loamy sediment fills in collapse dolines near the Ljubljanica River springs, Dinaric Karst, Slovenia. Cave and Karst science 33-3. Buxton.
- Stepišnik, U. 2009: Active and relict alluvial fans on contact karst of the Vrhpoljska brda hills, Slovenia. Acta geographica Slovenica 49-2. Ljubljana. DOI: 10.3986/AGS49201
- Stepišnik, U., Mihevc, A. 2008: Investigation of structure of various surface karst formations in limestone and dolomite bedrock with application of the Electrical resistivity imaging. Acta carsologica 37-1. Ljubljana.
- Summerfield, M. A. 1996: Global geomorphology: an introduction to study of landforms. Longmann. London.
- Šušteršič, F. 1973: On the problems of collapse dolinas and allied forms of high Notranjsko (Southcentral Slovenia). Geografski vestnik 45-1. Ljubljana.
- Šušteršič, F. 1984: Preprost model preoblikovanja udornic. Acta carsologica 12-1. Ljubljana.
- Waltham, T. 2005: Tiankengs of the world, outside China. Speleogenesis and Evolution of Karst Aquifers. Huntsville.
- Waltham, T., Bell, F., Culshaw, M. 2005: Sinkholes and Subsidence, Karst and Cavernous Rocks in Engineering and Construction. London.

Sedimenti v udornicah na Krasu, Slovenija

DOI: 10.3986/AGS51201

UDk: 911.2:551.435(497.471)

COBISS: 1.01

IZVLEČEK: V članku je predstavljena podrobno geomorfološka analiza udornic na Krasu v Sloveniji, s posebnim poudarkom na morfo-genetskem razvoju njihovih dnov, ki jih prekriva ilovnat sediment. Analizirali smo granulometrično in mineraloško sestavo ilovnatnega sedimenta; globino sedimentnih zapolnitev smo ugotovili z meritvami električne upornosti tal (ERI). Obravnavamo procese oblikovanja in preoblikovanja udornic ter različne procese oblikovanja ilovnatih uravnjav v dneh udornic. Rezultati raziskave so pokazali, da so ilovnate zapolnitve lahko rezultat sedimentacije suspendiranega materiala iz poplavnih vod, ki je zapolnjevala spodnje dele udornic, ali pa ilovica izvira iz pobočij, kjer razpadajo jamski rovi, ki jih zapolnjuje ilovnat material. Nekateri sedimenti so bili akumulirani kot eolski material.

KLJUČNE BESEDE: geografija, kras, udornice, ilovnat sediment, električna prevodnost tal (ERI), Slovenija

Uredništvo je prejelo prispevek 18. oktobra 2010.

NASLOV:

dr. Uroš Stepišnik

Oddelek za geografijo

Filozofska fakulteta, Univerza v Ljubljani

Aškerčeva 2, SI – 1000 Ljubljana

E-pošta: uros.stepisnik@gmail.com

Kazalo

1	Uvod	247
2	Udornice na Krasu	247
2.1	Udornice na Divaškem krasu	248
2.2	Udornice na Sežansko-Nabrežinskem ravniku	249
2.3	Udornice severno od Divaškega preloma	250
2.4	Udornice na Taborskih brdih in Gabrku	251
3	Sklep	251
4	Literatura	252

1 Uvod

Udornice so kotanje na kraškem površju različnih oblik in velikosti. Prostornina večjih udornic presega prostornino največjih znanih jamskih dvoran na preučeni območjih, tako da nastanek udornic ne more biti vezan le na procese podiranja jamskih dvoran (Habič 1963; Šušteršič 1973; Stepišnik 2004, Waltham et al; 2005 Stepišnik 2007). Njihov nastanek je vezan na koncentrirano spodjedanje materiala tektonsko zdobljenih con nad aktivnimi jamskimi rovi (Habič 1963; Mihevc 2001; Stepišnik 2004). Čeprav so bile udornice navadno opredeljene kot kotanje, ki se oblikujejo izključno z udorom nad jamsko dvorano (Cramer 1941; Gams 1973; Šušteršič 1973, Ford in Williams 1989), k njihovemu razvoju prispevajo tudi drugi speleogenetski procesi odnašanja mase.

V objavljeni strokovni literaturi najdemo različne morfološke klasifikacije udornic. Najpogostejša je preprosta delitev udornic v »mlade« in »zrelo« oziroma »stare« (Habič 1963; Šušteršič 1984; Summerfield 1996, Waltham et al; 2005 Waltham 2006). Kljub vsemu je morfologija udornic rezultat ravnotežja med različnimi geomorfnimi procesi, katerih dinamika, obseg in čas trajanja vpliva na njihovo velikost in obliko. Zaradi tega klasična delitev, ki ocenjuje njihovo starost na podlagi morfologije, ni primerna.

V dneh udornic delujejo različni procesi katerih rezultat je različna oblikovanost njihovih dnov. V primeru da je v udornicah prisoten proces odnašanja materiala nad aktivnimi jamskimi rovi so dna skalnata z lijakastimi kotanjami v akumuliranem pobočnem materialu. Če je proces odnašanja materiala zanemarljiv ali odsoten se bodo oblikovala skledasta dna zapolnjena z drobnejšimi frakcijami preperle matične kamnine, najpogosteje prekrte s prstjo. V dnu udornic je pogosto ilovnat material. V primeru da so dna v bližini piezometričnega nivoja so spodnji deli udornic stalno ali občasno zapolnjeni z vodo, ali pa je v dneh prisoten aktivni vodni tok. V večini primerov so dna takšnih udornic poplavljeni le občasno, ob višjih piezometričnih nivojih. Če poplavne vode vsebujejo večje količine suspendiranega gradiva, se bo le ta sedimentiral v stoječem vodnem telesu v dneh udornic. Ob sledečih poplavah se bodo v dnu sedimentirale dodatne plasti ilovnatega materiala. Končni rezultat tovrstne sedimentacije je oblikovanje ravnih ilovnatih dnov udornic (Stepišnik 2003; Stepišnik 2007). Pojavljanje ravnih dnov udornic na enakih nadmorskih višinah je posledica sedimentacije suspendiranega materiala iz poplavnih vod, ki so zapolnjevale spodnje dele sosednjih udornic ob istih poplavnih dogodkih (Stepišnik 2004; Stepišnik 2007). Če so dna, zapolnjena z ilovnatim materialom, več deset ali sto metrov nad piezometrično ravnijo, se gradivo ni moglo odložiti ob poplavah. V večini primerov je to spran pobočni material iz ilovnatih zaplat v pobočjih udornic. Glinene zaplate na pobočjih udornic so rezultat razpada jamskih rovov na pobočjih, ki so zapolnjeni z ilovnatim materialom, (Stepišnik 2007).

V članku so podrobneje predstavljene geomorfne analize udornic na Krasu s poudarkom na morfo-genetskem razvoju njihovih dnov. Raziskava je vključevala geomorfološko kartiranje vseh udornic na Krasu, kot tudi granulometrično in petrološko analizo ilovnatega materiala iz dnov udornic. Zgradba udornic pod površjem je bila ugotovljena z meritvami električne upornosti tal (ERI) in z interpretacijo rezultatov meritev. Podatki podpovršinske zgradbe so bili pridobljeni z merilcem električne upornosti tal SuperSting R1/IP.

Predhodne aplikacije metode električne upornosti tal na različnih delih slovenskega krasa so pokazale, da električna upornost karbonatne kamnine presega 1000 ohm-m. Prst in preperela matična kamnina ima električno upornost med 200 in 1000 ohm-m. Ilovnat material ima električno upornost nižjo od 150 ohm-m (Stepišnik 2007; Stepišnik in Mihevc 2008, Stepišnik, 2009).

2 Udornice na Krasu

Kras je apnenčasta planota nad Tržaškim zalivom v severnem Jadranskem morju. Razteza se v dinarski smeri (severozahod–jugovzhod); je 40 km dolga in 14 km široka pokrajina, ki pokriva okoli 440 km². Fiziografsko je dobro ločena od okoliških območij. Nižje flišnih regije in Jadransko morje ga obdajajo iz jugozahoda in severovzhoda. Na severozahodu ga obdaja naplavna ravnica reke Soče. Jugovzhodna meja Krasa je mogoče opredeliti s flišnimi Brkini in dolino reke Reke. Na splošno lahko predelimo Kras kot antiklinalo iz apnencev in dolomitov, ki se dviga nad dvema flišnima sinklinalama: sinklinala Vipavske doline in sinklinala Tržaškega zaliva. Močnejša tektonska linija, imenovana Divaški prelom, poteka preko kras v dinarski smeri in ga deli skoraj na polovico.

Kras je območje pretočnega krasa. V grobem je celoten Kras hidrološko zaledje reke Timave. Največji ponor alogenega toka v kras je Reka na jugovzhodu, medtem ko so mnogi manjši ponori manjših alogennih tokov prisotni na skrajnem vzhodnem in severnem delu. Večina podzemnih tokov se pretaka južno od Divaškega preloma, od ponorov Reke v smeri izvirov na severozahodu.

Udornice so na celotnem Krasu. Glede na prostorsko razdelitev, morfologijo in aktivne geomorfne procese v njih jih lahko razdelimo na štiri skupine: udornice na Divaškem Krasu, udornice na Sežansko-Na-brežinskem ravniku, udornice severno od Divaškega preloma ter udornice na Taborskih brdih in Gabrku.

Slika 1: Lokacija udornic na Krasu.
Glej angleški del prispevka.

2.1 Udornice na Divaškem krasu

Divaški kras je na jugovzhodnem delu Krasa v zaledju ponorov reke Reke, v okolici Divače. Matična kamnina na območju so debeloskladoviti kredni apnenci. Divaški kras leži severozahodno od stika z eocenskimi fliši. Na koncu obsežne slepe doline na vzhodnem obrobju Divaškega krasa ponira Reka v Škocjanske jame. Površje Divaškega krasa je v grobem uravnano na nadmorski višini 430 m in je razčlenjeno s številnimi vrtačami, udornicami in brezstropimi jamami.

Na površju je 27 velikih udornic, ki imajo skupno prostornino več kot 41 Mm³. Njihova povprečna globina je okoli 45 m in povprečni premer je 270 m. Njihova površina je 1,5 km². Udornice na tem območju so različnih oblik. Večina njihovih pobočij je uravnoveženih, a so v njih pogoste tudi obsežne stene in melišča. Razen v Veliki in Mali dolini, ki sta neposredno nad Škocjanskimi jamami, kjer se podzemni vodni tok reke Reke ponovno pojavi na površju, imajo vse ostale udornice dna zapolnjena in uravnana z ilovnatim materialom. Petrološka analiza peščene frakcije je dokazala, da so v sedimentu minerali flišnega izvora: roženec, limonit, kremenov peščenjak in sljuda. Granulometrična analiza sedimenta je pokazala, da ilovnat sediment vsebuje delce velikosti melja in glin.

Več sosednjih udornic ima uravnana ilovnata dna na enakih nadmorskih višinah. Na Divaškem krasu lahko nekatera uravnana dna razporedimo v dva izrazita višinska nivoja. Udornice na južnem delu območja, v okolici Sokolaka, imajo dna na nadmorskih višinah med 350 in 360 m. Dna v severni skupini udornic, med udornicama Sapendol in Lazni dol, so na nadmorskih višinah med 415 in 433 m. Primerljive nadmorske višine uravnanih dnov udornic so posledica sedimentacije drobnih delcev flišnega izvora iz stoječe vode, ko je ob višjih piezometričnih nivojih, ko dna udornic poplavljeni.

Tipičen primer udornice na južnem delu območja je Sokolak, ki se nahaja približno 650 m jugoza-hodno od ponora reke Reke. Sokolak je sestavljen iz dveh podolgovatih udornic, razpotegnjenih v smeri sever–jug. Zahodna udornica ima dolžino 470 m in širino 230 m, povprečna globina je 63 m. Vzhodna udornica ima dolžino 540 m in širino 230 m. Povprečna globina je 66 m. Prostornina obeh udornic je 6,86 Mm³. Na južnih pobočjih udornice so strme stene z obsežnim meliščem pod njimi. Ostala pobočja so večinoma uravnovežena in jih prekrivajo škraplje. Dna obeh udornic sta uravnana z ilovnatim materialom. Zahodni del udornice je uravnan na 350 m nadmorske višine in vzhodni del na 357 m. Nadmorski višini obeh uravnava se ujemata z nadmorskimi višinami dnov nekaterih okoliških udornic, ki so razporejena med 350 in 360 m nadmorske višine.

Meritvi električne upornosti tal sta bili opravljeni v vzhodnem delu udornice. Profil 1, ki je bil izmerjen v vzhodju južnega pobočja (smer 30° z razdaljo med elektrodami 5 m), je pokazal, da imajo živoskalna apnenčasta pobočja, ki jih ne prekriva prst ali vegetacija, električno upornost višjo od 1000 ohm-m. Na vzhodju pobočja je v dnu udornice obsežno ilovnato polnilo, ki ima električno upornost manjšo od 150 ohm-m, prekrito z apnenčastim gruščem, ki ima električno upornost med 150 in 1000 ohm-m. Profil 2 je bil izmerjen pravokotno na daljšo os udornice v smeri 120° z enako razdaljo med elektrodami. Tukaj imajo živoskalna pobočja električno upornost višjo od 1000 ohm-m, prekriva jih plitva prst in preperela kamnina z električno upornostjo do 500 ohm-m. V osrednjem delu profila je dno uravnano z ilovnatim sedimentom, ki ima električno upornost manjšo od 150 ohm-m, in zapolnjuje udornico vsaj 23 m globoko.

Slika 2: Udornica Sokolak s smermi profilov električne upornosti tal.
Glej angleški del prispevka.

Slika 3: Profil električne upornosti tal 1 v udornici Sokolak.
Glej angleški del prispevka.

Slika 4: Profil električne upornosti tal 2 v udornici Sokolak.
Glej angleški del prispevka.

Lazni dol pripada severni skupini udornic. Leži 1500 m severozahodno od ponora reke Reke. Je razpotegnjena v smeri severozahod – jugovzhod smeri z dolžino 280 m in širino 220 m. Povprečna globina udornice je 24 m in prostornina okoli $0,5 \text{ Mm}^3$.

Pobočja so uravnovežena, prekrita s škrapljami, in imajo naklon do 17° . Dno udornice je obsežna ilovnata uravnava, dolga 220 m. Najnižji del dna je na nadmorski višini 424 m. Nadmorska višina dna se ujema z nadmorskimi višinami okoliških udornic v severnem delu Divaškega krasa, ki so na nadmorski višini med 415 in 433 m. V Laznem dolu sta bili opravljeni dve meritvi električne upornosti tal. Profil 1, v dnu udornice v smeri 135° , je pokazal, da del spodnji del živoskalnega pobočja prekriva plitva plast prsti in preperela kamnina z električno upornostjo med 200 in 1000 ohm-m. Ilovnat sediment, ki zapolnjuje dno udornice ima električno upornost manjšo od 150 ohm-m. Apnenčasta matična kamnina, ki je pod pobočnim materialom in delom ilovnatega dna, ima električno upornost višjo od 1000 ohm-m. V osrednjem delu udornice materiala z večjo električno prevodnostjo večja od 25 m. Profil 2 je bil izmerjen v smeri 225° . Pokazal je, da je debelina ilovnate zapolnitve v dnu udornice, ki ima električno upornost manjšo od 150 ohm-m, večja od 28 m.

Slika 5: Udornica Lazni dol s smermi profilov električne upornosti tal.
Glej angleški del prispevka.

Slika 6: Profil električne upornosti tal 1 v udornici Lazni dol.
Glej angleški del prispevka.

Slika 7: Profil električne upornosti tal 2 v udornici Lazni dol.
Glej angleški del prispevka.

2.2 Udornice na Sežansko-Nabrežinskem ravniku

Sežansko-Nabrežinski ravniki leži jugozahodno od Divaškega preloma. Geološko ga lahko opredelimo kot jugozahodno krilo antiklinala Krasa, ki ga gradijo predvsem kredni apnenci in dolomiti, in je na jugu omejeno z flišem. Kraško površje je v grobem uravnano, prekrto z mnogimi vrtačami, udornicami in brezstropimi jamami, ter se postopoma znižuje od 350 m nadmorske višine pri Sežani do 150 m nadmorske višine na severozahodu. Pod površjem je podzemni tok reke Reke, ki teče v smeri severozahoda proti izvirov Timave.

Na površju je 24 velikih udornic s skupno prostornino več kot $38,1 \text{ Mm}^3$. Njihova povprečna globina je okoli 33 m, povprečni premer pa 248 m. Njihova površina je $2,2 \text{ km}^2$. Največja udornica na območju se imenuje Senik in presega prostornino $9,8 \text{ Mm}^3$.

V grobem imajo udornice na tem območju enotno morfolgijo. Večina udornic ima uravnovežena pobočja in samo nekatere imajo večje stene in melišča. Nekatera pobočja so pokrita z zaplatami ilovnatega materiala. Na teh zaplatah so oblikovani erozijski jarki, ki se iztečejo v manjše vršaje v dneh udornic. Zaplate ilovnatega materiala prekrivajo tudi dna udornic, a so bistveno manjše kot na Divaškem krasu. Petrološka analiza peščene frakcije v sedimentu pokazala, da so v ilovici prisotni minerali flišnega izvora. Granulometrična analiza sedimenta je pokazala, da ilovico gradijo predvsem delci velikosti melja in gline.

Tipični primer udornice tega območja je Sežanski dol, ki leži južno od Sežane. Njena dolžina je 230 m in širina 166 m. Povprečna globina je 28 m, prostornina pa $0,42 \text{ Mm}^3$. Severna in severovzhodna pobočja udornice so uravnovežena. Druga pobočja so stenasta, z melišči pod stenami. Južno pobočje je prekinjeno z obsežnim jarkom, ki ga zapolnjuje ilovnat material in kosi sige. Jarek je razpadel jamski rov v pobočju udornice.

Slika 8: Udornica Sežanski dol s smermi profilov električne upornosti tal.
Glej angleški del prispevka.

V udornici sta bila izmerjena dva profila električne upornosti tal. Profil 1 v dnu udornice je bil izmerjen v smeri 270°. Meritev je pokazala, da so spodnji deli pobočij prekriti s plitvo plastjo prsti in preperela kamnina z električno upornostjo med 200 in 1000 ohm-m. Ilovnat material, ki zapolnjuje udornico, ima električno upornost do 150 ohm-m. Apnenčasta matična kamnina, ki leži pod pobočnim materialom, ima električno upornost višjo od 1000 ohm-m. V osrednjem delu udornice debelina ilovnatega materiala presega 20 m. Profil 2 je bil izmerjen pravokotno na smer jarka na južnem pobočju udornice. Smer profila je 270°. Meritev je pokazala, da je jarek, ki je nastal z razpadom jamskega rova, je zapolnjen z ilovnatim materialom z električno prevodnostjo manj kot 150 ohm-m. Širina ilovnate zapolnitve je približno 25 m in globina vsaj 10 m.

Slika 9: Profil električne upornosti tal 1 v udornici Sežanski dol.
Glej angleški del prispevka.

Slika 10: Profil električne upornosti tal 2 v udornici Sežanski dol.
Glej angleški del prispevka.

2.3 Udornice severno od Divaškega preloma

Skoraj polovica Krasa leži severno od Divaškega preloma. Matična kamnina na območju so predvsem kredni apnenci z roženci. Hidrološko je to območje brez večjih znanih koncentriranih podzemnih vodnih tokov, saj le manjši potoki na severu in severozahodu ponikajo in teče v smeri izvirov Timave. Površje je v grobem uravnano in ima 270 m nadmorske višine na jugovzhodu, ter se postopoma znižuje proti severozahodu do nadmorske višine okoli 170 m. Uravnano površje prekrivajo mnoge vrtače, brezstropne jame, udornice in suhe doline ter manjši grebeni na severni in vzhodni strani območja.

Na območju je 36 velikih udornic s skupno prostornino več kot 45,6 Mm³. Njihova povprečna globina je okoli 32 m, srednji premer je 274 m. Pokrivajo območje veliko 2,3 km². Vse udornice na tem območju so čisto preoblikovane, saj niti ena nima stenastih pobočij in nikjer ni sledov delujočega podzemnega spodjedanja materiala nad aktivnimi jamskimi rovi. Vsa pobočja so uravnatežena in prekrita predvsem s škrapljami. Na pobočjih so včasih prisotne tudi vrtače. Na pobočjih udornic so pogosti erozijski jarki na zaplatah ilovnatga materiala v katerih se spira material proti dnu. Dna udornic so navadno velike ilovnate uravnave. Glede na meritve električne upornosti tal so ilovnate zapolnitve le nekaj metrov globoke, pod njimi pa leži karbonatna matična podlaga. Torej so te udornice skledaste živoskalne kotanje, ki imajo dna zapolnjena in uravnana z ilovnatimi zapolnitvami.

Granulometrična analiza sedimenta je pokazala, da ilovico, ki zapolnjuje dna udornic, gradijo predvsem delci velikosti melja in gline. Petrološka analiza peščene frakcije v sedimentu pokazala, da so v ilovici prisotni minerali flišnega izvora.

Zajčnik je tipičen primer udornice te skupine. Leži 5 km jugozahodno od vasi Štanjel. Udornica je okrogle oblike s premerom okoli 230 m in globino 21 m ter prostornino 0,42 Mm³. Vsa pobočja udornice so popolnoma uravnatežena in delno prekrita s škrapljami. Dno udornice je uravnano, okoli 40 m široko in zapolnjeno z ilovnatim materialom do nadmorske višine 222 m.

Slika 11: Udornica Zajčnik s smerjo profila električne upornosti tal.
Glej angleški del prispevka.

Profil električne upornosti tal v udornici Zajčnik je bil izmerjen preko uravnane dna v smeri 35°. Meritev je pokazala, da je spodnji del živoskalnih pobočij prekrit z plitvo plastjo in preperelo matično kamnino, ki ima električno upornost med 200 in 1000 ohm-m. Zapolnitev ilovnatga sedimenta v dnu udornice ima električno upornost manjšo od 150 ohm-m. Apnenčasta matična podlaga pod pobočnim materialom in pod ilovnato zapolnitvijo v dnu ima električno upornost višjo od 1000 ohm-m. V osrednjem delu udornice je debelina ilovnatga materiala okoli 15 m.

Slika 12: Profil električne upornosti tal v udornici Zajčnik.
Glej angleški del prispevka.

2.4 Udornice na Taborskih brdih in Gabrku

Taborska brda in Gabrku sta grebena na jugovzhodnem delu Krasa. Potekata v smeri severozahoda in sta okoli 200 m višja od okoliškega kraškega površja. Sestavljena sta iz apnenca in dolomita kredne starosti. Površje obeh grebenov prekrivajo kopasti vrhovi, številne vrtače in udornice.

Na obeh grebenih je 9 udornic. Njihova skupna prostornina je približno $3,2 \text{ Mm}^3$, povprečna globina je okoli 28 m in povprečni premer pa 200 m. Njihova površina je $0,2 \text{ km}^2$. Imajo zelo različne oblike, najpogostejša so uravnotežena pobočja in erozijski jarki na njih. Dna udornic te skupine so uravnane in zapolnjena z ilovnatim materialom. Te udornice so morfološko najbližje udornicam severno od Divaškega preloma.

Granulometrična analiza sedimenta je pokazala, da ilovico ki zapolnjuje dna udornic sestavljajo predvsem delci velikosti melja in gline. Petrološka analiza peščene frakcije v sedimentu pokazala, da so v ilovici prisotni minerali flišnega izvora. Drobna kremenova zrna peščene frakcije na površinah kažejo sledove vetrne abrazije.

Najbolj značilen primer udornice na tem območju je Dol Lipovnik, ki je skoraj na vrhu grebena Taborskih brd okoli 1,5 km jugovzhodno od Sežane. Dolžina udornice je 290 m, širina 250 m in povprečno globina 43 m. Prostornina udornice je $1,24 \text{ Mm}^3$. V zgornjih delih vzhodnega in zahodnega pobočja so stene z melišči v njihovem vznožju. Druga pobočja so uravnotežena in prekrita s posameznimi škrapljami. Dno udornice je uravnano na nadmorski višini 443 m. Premer uravnane dna je 140 m.

Slika 13: Udornica Dol Lipovnik s smerjo profila električne upornosti tal.
Glej angleški del prispevka.

Slika 14: Profil električne upornosti tal v udornici Dol Lipovnik.
Glej angleški del prispevka.

Profil električne upornosti tal v udornici Dol Lipovnik je bil izmerjen v preko uravnane dna v smeri 150° . Meritve so pokazale, da so spodnji deli živoskalnih pobočij prekriti z plitvo plastjo prsti in preperle matične kamnine z električno upornostjo med 200 in 1000 ohm-m. Zapolnitev ilovnatnega materiala v dnu udornice ima električno upornost do 150 ohm-m. Apnenčasta matična kamnina pod pobočnim materialom in ilovnatim materialom v dnu udornice ima električno upornost večjo od 1000 ohm-m. Globina ilovnate zapolnitve je približno 20 m. V osrednjem delu pa debelina ilovnate zapolnitve presega 25 m.

3 Sklep

Raziskava udornic na Krasu, ki so predstavljene v tem članku kaže, da je sediment v dneh udornic različnega izvora. Čeprav so mehanizmi sedimentacije različni, vedno oblikujejo relativno enotna uravnana dna.

Ilovnat material popolnoma zapolnjuje prvotna dna udornic. Metoda električne upornosti tal je bila uporabljena za ugotavljanje debeline sedimentov v dneh udornic. Meritve so pokazale, da električna upornost karbonatne matične kamnine presega 1000 ohm-m. Ilovnat material ima električno upornost nižjo od 150 ohm-m. Električna upornost prsti, preperle kamnine in melišč je med 250 in 1000 ohm-m. Zaradi odsotnosti vode imajo aktivna pobočja z melišči, ki so brez prsti in vegetacije, električno upornost višjo od 1000 ohm-m. V vseh proučevanih udornicah lahko jasno ločimo pobočja od dnov. Pobočja gradi matična kamnina z visoko električno upornostjo, ki jih pogosto prekriva plast preperle matične kamnine in prsti z manjšo električno upornostjo. Na dneh so debele zapolnitve ilovnatnega materiala in zaplate pobočnega materiala v vznožju aktivnih pobočij. Ilovnat material, ki zapolnjuje dna udornic, je flišnega izvora, ki se je akumuliral z različnimi mehanizmi. Na pobočjih nekaterih udornic so sledovi razpadlih jamskih rogov, ki jih zapolnjuje ilovnat material in siga. Na teh zaplatah neprepustnega sedimenta deluje površinski odtok padavinske vode, kar je oblikovalo erozijske jarke. Pod erozijskimi jarki so se v dneh udornic oblikovali manjši vršaji. Ta mehanizem sedimentacije ilovnatnega materiala je bil aktiven v večini udornic in je prevladujoč mehanizem dotoka ilovnatnega materiala v udornice severno od Divaškega preloma ter v udornice na Sežansko-Nabrežinskem ravniku.

Drugi mehanizem akumulacije materiala flišnega izvora je prisoten na ponornem Divaškem krasu, ki je ponorni tip kontaktne krasa. Podobne nadmorske višine dnov udornic dokazujejo, da je bil proces, ki je povzročil sedimentacijo, aktiven na večjem območju v več udornicah hkrati. Sedimentacija ilovnatnega

sedimenta v dneh udornic je rezultat nihanja vodostaja reke Reke in posledičnega poplavljanja v Divaškem krasu. V dneh udornic, ki so segala pod zgornji nivo poplavnih vod, ki so prinašala ilovnat sediment, so se oblikovale uravnave.

Nekatera drobna kremenova zrna iz dnov udornic na površinah kažejo sledove vetrne abrazije. Območje Krasa je pod vplivom močnih vetrov – Burje iz smeri severovzhoda, kjer leži flišna Vipavska dolina. Manjša količina sedimenta je morala biti v udornice prinesena tudi kot eolski sediment.

4 Literatura

Glej angleški del prispevka.